


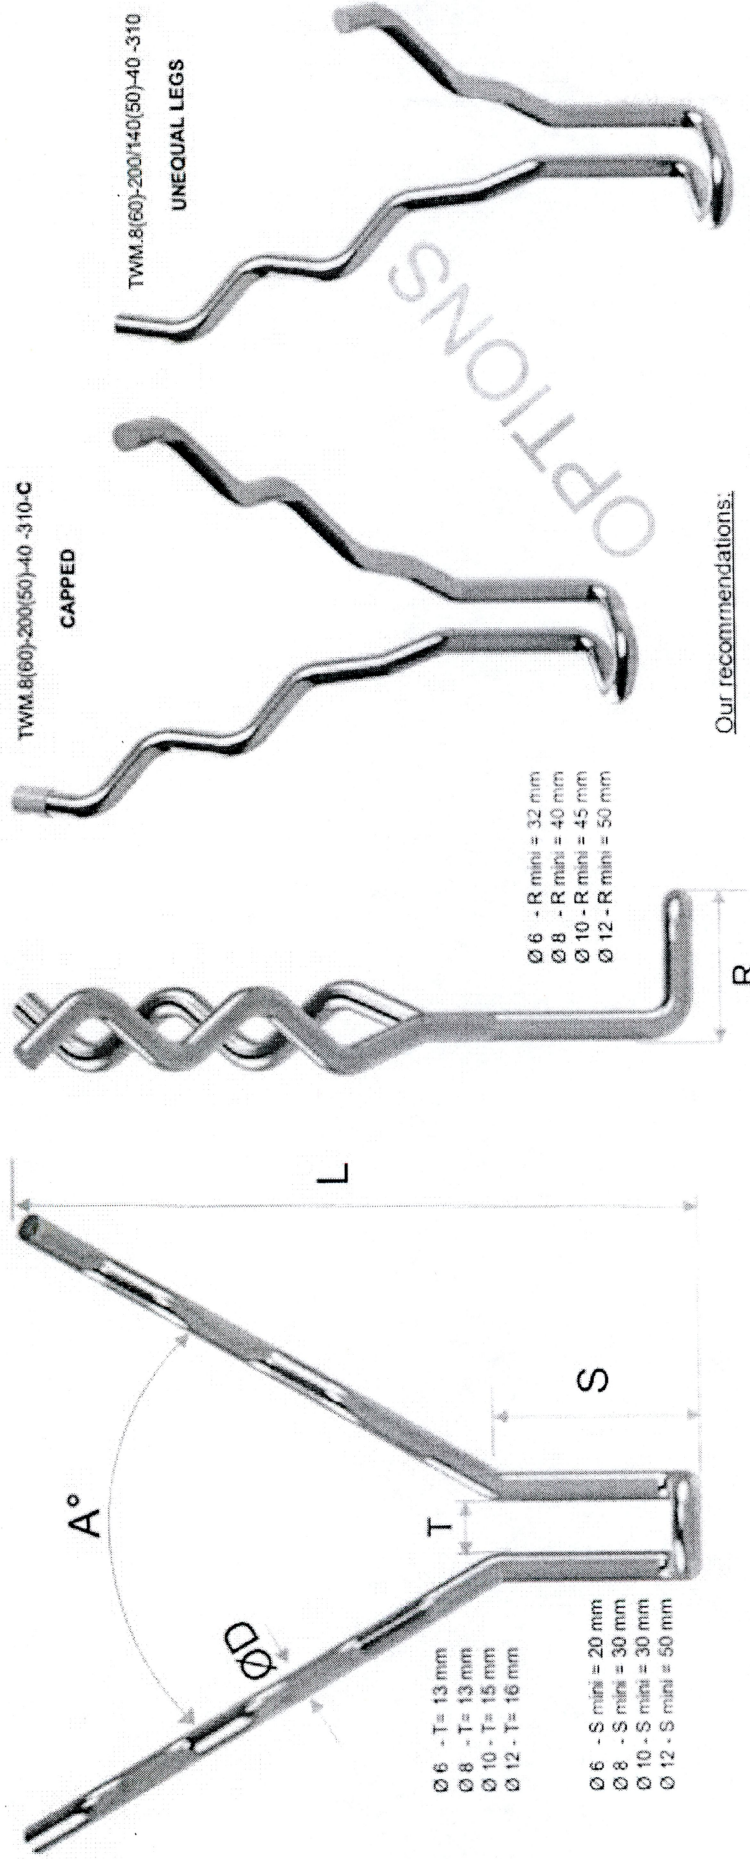

Our recommendations:

- The bent foot allows easier 90° positioning on steel casing and makes welding longer / stronger (welding only external)
- Always cap your anchors, it will give a small space into which the thermal expansion steel alloy (higher than castable) can move without creating stress and possibly damaging in the castable.


TWM.8 (60) -200(50)-40- 310

TYPE Ø D ANGLE LENGTH STEP LENGTH ALLOY

Anchors are manufactured with a DIN EN 10276 (EN 871) cold drawn wire, by means using hydraulic tools that allows inflexing, bend marking and avoids micro cracks.

www.anchorstorefractory.com

contact@anchorstorefractory.com



Tel : + 33 3 66 50 00 33 / +33 7 85 06 29 49

PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentioned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use if you want some suggestions from us, applicable for your specific application and/or environment, please contact us.